

Q2 wireless kinetic doorbell Specification

1.product description

1> brief introduction


Built in micro-energy acquisition module, Q2 doorbell features self-powered technology, no battery is required. It converts mechanical energy pressed by finger into electrical energy, activating the wireless signal transmission. Communication mode is RF, no wire is required, doorbell receiver comes with multiple ringtones and adjustable sound volume.

2>product picture



2.Features

1> receiver buttons instruction

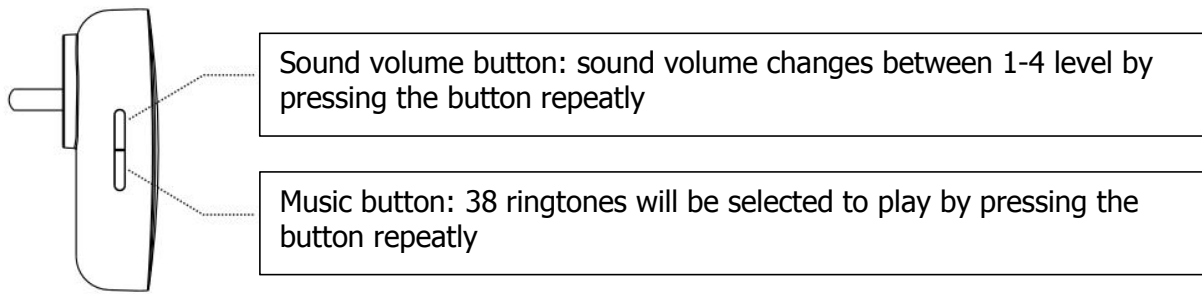

2>pairing method for receiver and transmitter

long press on "pairing" button of receiver for three seconds, when the indicator flashes slowly, press selected switch to get both units paired. Indicator goes off that means pair succeeds.

3>silent mode

Hold the music button for about 8 seconds, the indicator from receiver will flash then light on, loose the figner after it the light stays on, receiver enter to silent mode. To cancel the silent mode, repeat the above operation.


4>Erase paring

Press and hold the music button for about 12 seconds, the receiver indicator will flash and light on and then go off. Loose your finger after it goes off, now doorbell memory has been erased,. It needs to pair with new transmitters to work.

3.specification

Switch type	Push button
working voltage	AC100V-240V 50/60Hz
power supplier	Self-powered
communication mode	RF 433MHz (ASK)
sound volume	4 adjustable levels
ringtones	40
Capacity	Receiver works with maximum 10 transmitters
Wireless Distance	Outdoor:100m,Indoor:25m
standby power	< 0.15W
plug type	CN plug (EDR04-A-CH) ; EU plug (EDR04-A-EU)
transmitter dimension	L46mm*W21mm*H75mm
receiver dimension	L54mm*W28mm*H86mm
working temerature	-20°C~ +55°C
product weight	58g (receiver) 35g (transmitter)
color	white

3.dimension

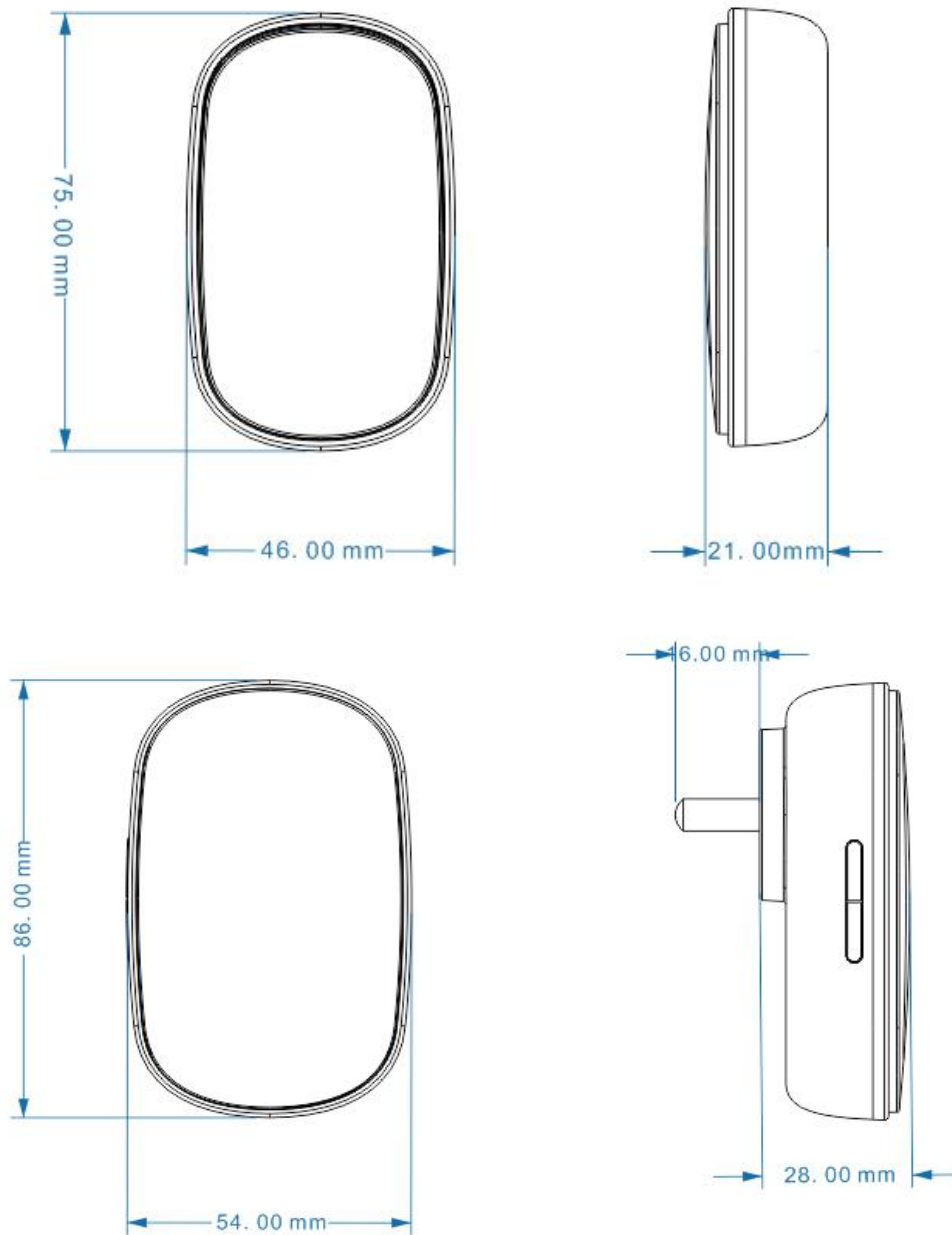

receiver